


VALVE REGULATED LEAD ACID RECHARGEABLE BATTERY
DFT150-12 AGM
FRONT TERMINAL



Unit:(inch) Terminal type:(M6)


Dimensions: 4.3"W x 22.24"L x 11.33"H

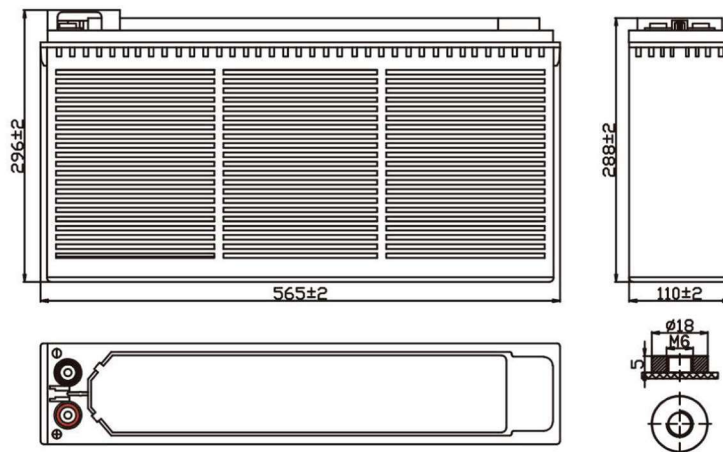


Parameter Chart:

Volts		12V	
Capacity(25°C)	10 hours rate (15A)	150Ah	
Discharge Current Testing (25°C)	1 hours rate (82.5A)	85Ah	
	3 hours rate (37.5A)	114Ah	
Internal Resistance	Full Charged Battery 25°C	5mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 45A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		45.3Kg	

Residual Capacity

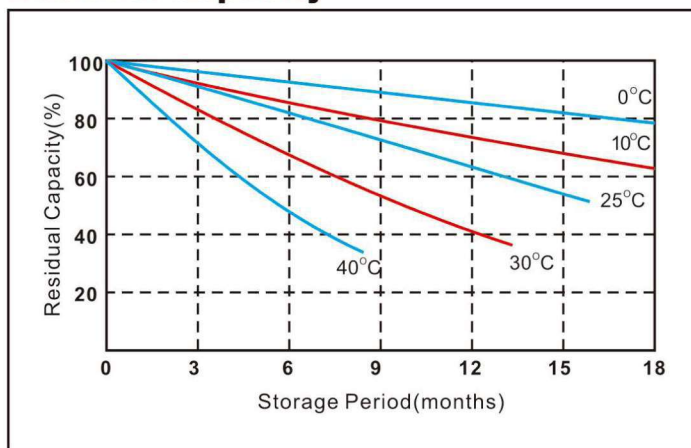

Discharge Current 25°C

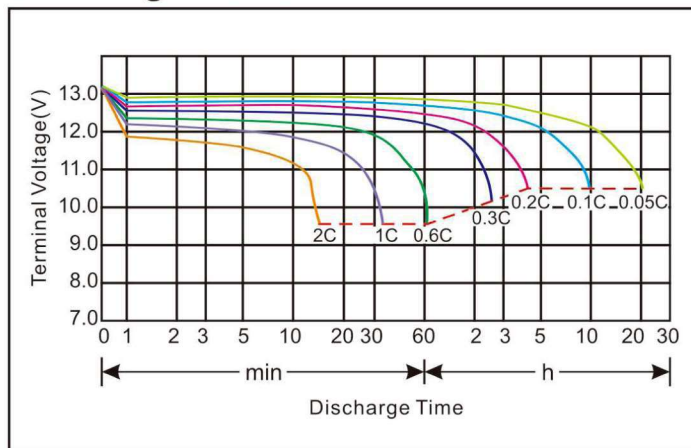


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.




DFT150-12 AGM
FRONT TERMINAL



Constant voltage charging characteristics

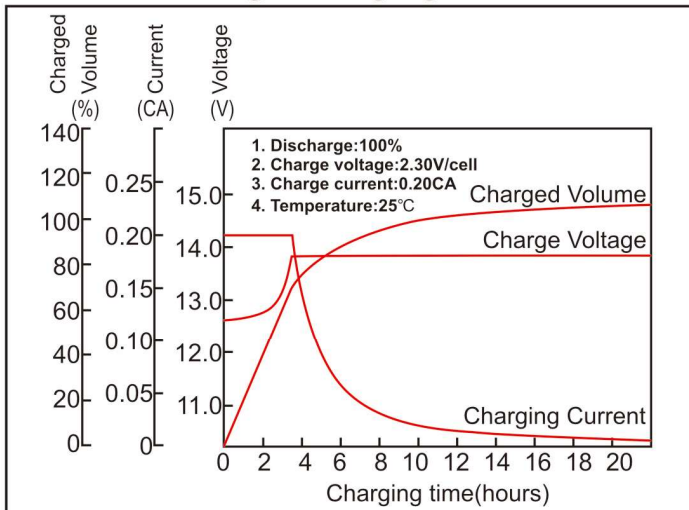

Float Life

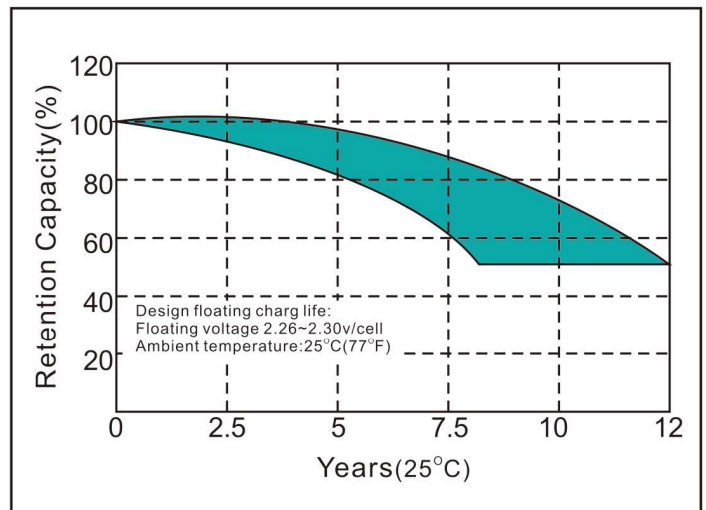

Constant Current Discharge Characteristics(A,25°C)

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	253.6	150.4	86.5	53.4	38.0	31.1	27.3	18.1	15.2	7.9
10.2V	238.6	144.8	84.2	52.4	37.4	30.7	26.4	17.9	15.1	7.8
10.5V	228.6	141.0	82.1	51.4	36.6	30.5	25.7	17.6	15.0	7.7
10.8V	221.4	137.2	78.6	50.8	35.7	29.5	24.8	17.4	15.0	7.6

Constant Power Discharge Characteristic(Watt,25°C)

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	2789.6	1635.3	951.2	588.6	418.9	361.3	301.7	199.8	167.5	87.2
10.2V	2672.3	1578.9	925.6	576.6	412.2	352.1	290.8	197.6	166.4	86.3
10.5V	2582.3	1536.2	902.4	565.1	402.9	344.5	283.5	193.6	165.2	85.6
10.8V	2524.0	1502.1	864.1	558.4	392.7	333.8	272.8	191.4	164.7	84.8

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.